
2861 Eagandale Blvd.
Eagan, MN 55121



CLEARMIRROR

P: 651.251.9036
F: 651.739.0403
www.clearmirror.com

SPECIFICATIONS

ClearLite by ClearMirror - LED Sidelit Mirror Models 18100-1836SL and 18100-2436SL.

Made in the USA



LED and POWER SUPPLY


Lighted 1/4" (6mm) U.S. manufactured copper free polished silver mirror with frosted area and polished edges. Stainless steel wall mounted base and stainless steel mirror hangers. Surface mounted LED strip light, 3000K warm white light (other light color (K) available with custom order). 82 CRI.

12-volt constant volt driver (IP20) integrated into wall mount. Input voltage: 110V 60Hz. Output voltage: 12 V DC. Standard US plug. LED Lighted

INSTALLATION

The electrical outlet box is installed behind the mirror wall hanger. The transformer power supply (above) is designed to be plugged into standard 110V US outlet installed by licensed electrician meeting all local and U.S. building codes. Electric box should be wired so that wall light switch will turn the mirror on and off.

Using the four mounting holes, note the direction of the arrows for up and attach mirror to the wall. Installer is responsible for determining and using the appropriate fasteners to fasten mirror to wall. After installing wall mirror hanger on wall, plug power cord into the outlet box. Now hang the mirror onto the wall hanger. Both upper and lower hangers must be inserted into the mounting slots.

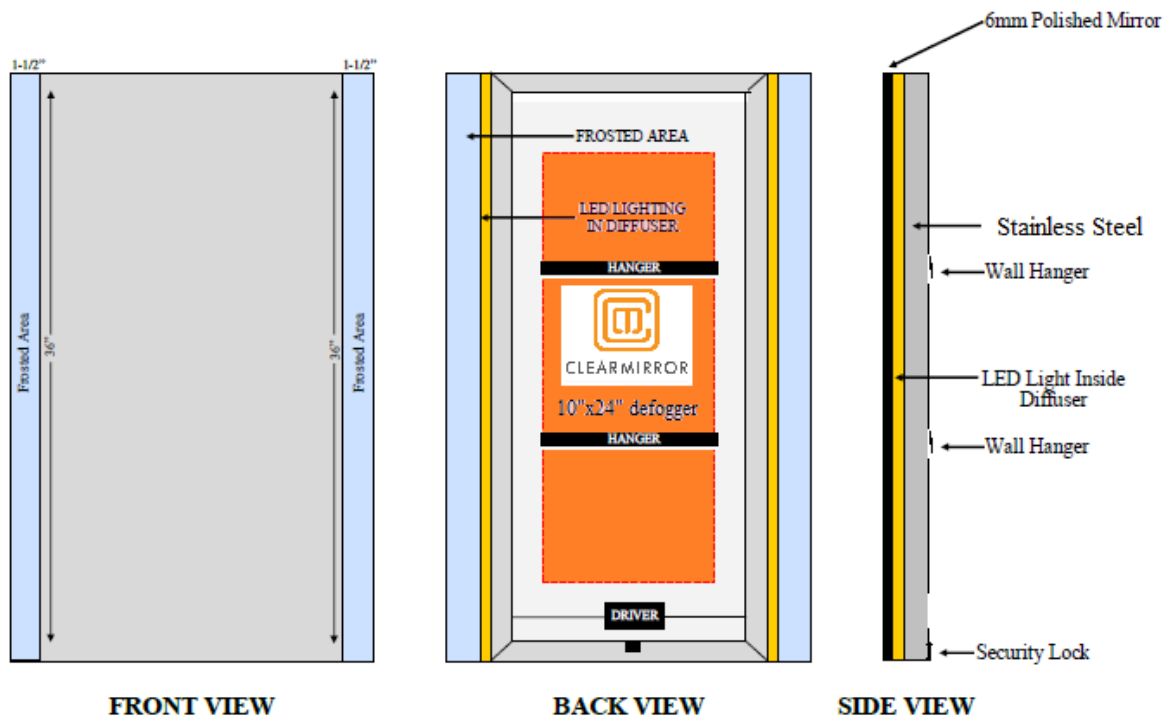

CARE OF YOUR LIGHTED MIRROR

Dampen a lint free cloth and lightly clean the surface. Never use chlorine base, chemical glass cleaners or any abrasive material on the Mirror. Use of those cleaners or chemicals will void all warranties and guarantees. DO NOT SPRAY MIRROR.

WARRANTY

We provide a one-year warranty against defects in workmanship or materials. Improper installation and/or cleaning voids the warranty. A two-year warranty is extended against mirror spoilage (with the above conditions of care).